Limestone
Tile

Limestone Tile

Soft in tone yet strong in structure, Limestone tiles bring a sense of timeless calm to any space. Their organic variation and subtle movement create surfaces that feel grounded and enduring, ideal for both contemporary and classic design. Naturally cool underfoot and beautifully tactile, Limestone offers understated luxury for floors, walls, and outdoor settings.

Limestone Tile

Tiles:



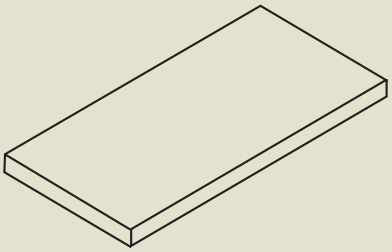

Coping / Step Tread

Square Edge

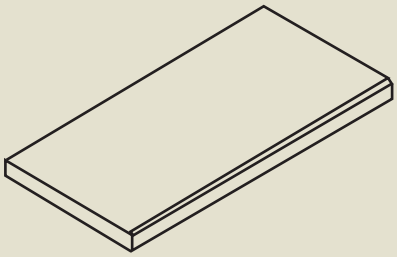

Rebated Square Edge

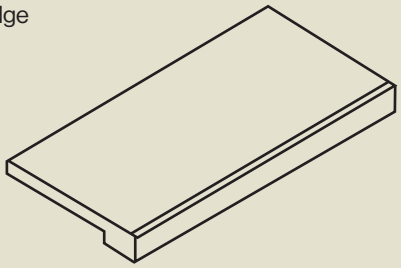

Cobblestones:



For more downloadables visit our website.

Limestone Tile

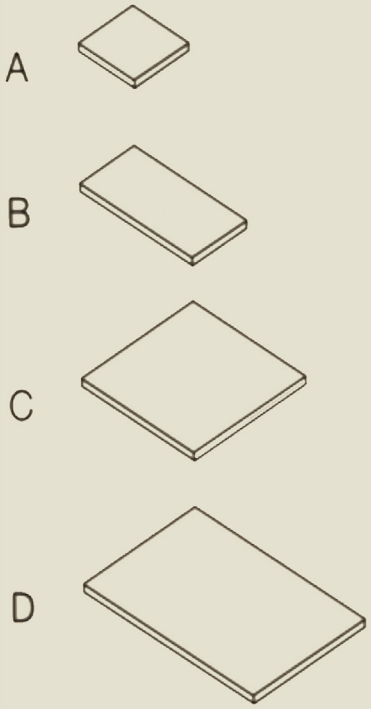

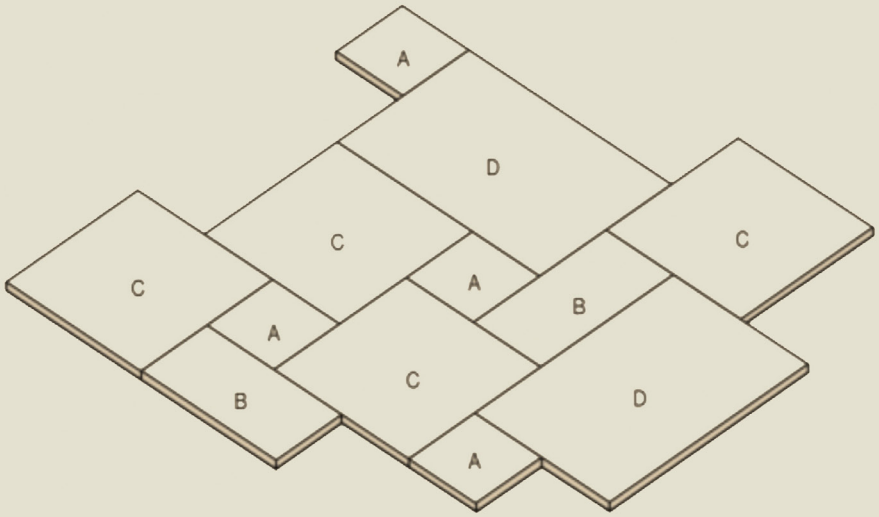

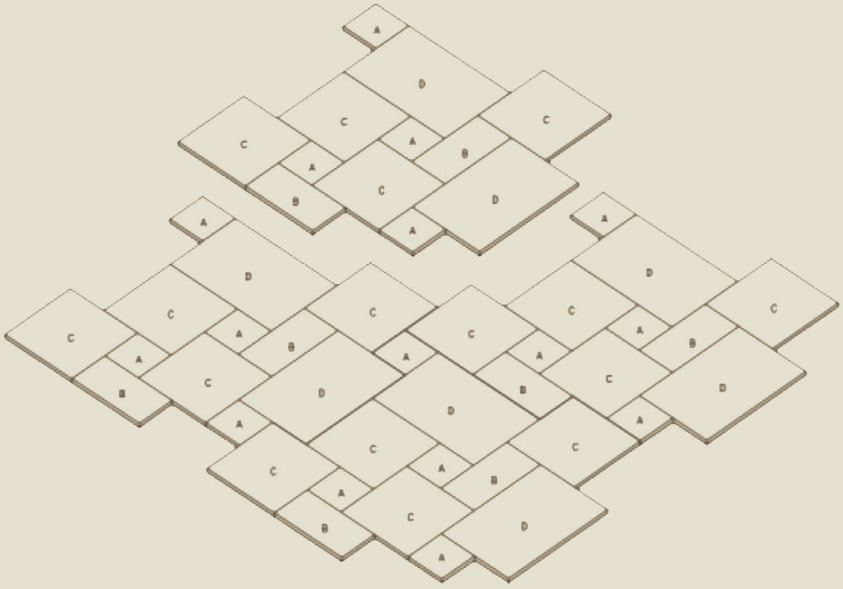

Bullnose



Bevelled

Dropface
(Mitre Cut&Glue)



Corner Dropface
One long and one short edge



Double Dropface
Two long edges



Triple Dropface
Two long and one short edges

For more downloadables visit our website.

Limestone Tile

Stone type and finish	Available tile sizes
Sienna Oro Sandblasted & Tumbled	610 x 406 x 12mm 610 x 406 x 30mm 900 x 600 x 20mm 610 x 406 x 30 mm Bullnose 610 x 406 x 30 / 60mm Dropface 900 x 400 x 30 / 70mm Dropface 1220 x 406 x 30mm Pencil edge 700 x 580 x 30mm Organic stepper French pattern set x 12mm
Sienna Ombro Acid Washed and Tumbled	610 x 406 x 12mm 610 x 406 x 30mm 610 x 406 x 30mm Bullnose 610 x 406 x 30 / 60mm Dropface
Sienna Fumé Sandblasted & Tumbled	610 x 406 x 15mm 610 x 406 x 30mm 610 x 406 x 30 / 60mm Dropface
Sienna Terra Sandblasted & Tumbled	610 x 406 x 12mm 610 x 406 x 30mm 900 x 600 x 20mm 610 x 406 x 30 / 60mm Dropface 900 x 600 x 30 / 70mm Dropface
Capri Scuro Sandblasted	600 x 400 x 20mm 600 x 400 x 20 / 60mm Dropface 600 x 400 x 30mm Bevelled 100 x 100 x 20mm Cobble

2 Kirkdale Street, Brunswick East Victoria 3057, Australia,
03 9457 7489 ABN: 28 639 735 569

Limestone Tile

Stone type and finish	Available tile sizes
Capri Tempesta Acid Washed & Tumbled	600 x 400 x 18mm 600 x 400 x 20 / 60mm Dropface 600 x 400 x 30mm Bevelled
Capri Crema Sawn edge, Natural Split	18-25 mm Random crazy paving 400 x 400 x 30mm 600 x 400 x 30mm 600 x 600 x 30mm 800 x 400 x 30mm 600 x 300 x 30mm Bullnose 600 x 400 x 30mm Bullnose 800 x 600 x 30mm Organic stepper 600 x 500 x 30mm Organic stepper
Capri Notte Sandblasted & Tumbled	30mm Random crazy paving 610 x 406 x 12mm 610 x 406 x 30mm Standard tile/square edge coper 610 x 406 x 30 / 50mm Dropface
Capri Neve Sandblasted & Tumbled	30mm Random crazy paving 610 x 406 x 12mm 610 x 406 x 30mm Standard tile/square edge 610 x 406 x 30 / 50mm Dropface
Capri Coralia Honed & Tumbled	20mm Random crazy paving 600 x 400 x 20mm 600 x 400 x 30mm Standard tile/square edge 600 x 400 x 30/ 50mm Dropface 100 x 100 x 20mm Cobble

2 Kirkdale Street, Brunswick East Victoria 3057, Australia,
03 9457 7489 ABN: 28 639 735 569

Limestone Tile

Stone type and finish	Available tile sizes
Capri Nero Sawn edge, Natural Split	18-25 mm Random crazy paving 300 x 300 x 15mm 400 x 400 x 15mm 500 x 500 x 15mm 600 x 300 x 15mm 600 x 600 x 15mm 600 x 600 x 30mm 600 x 300 x 30mm Bullnose 600 x 400 x 30mm Bullnose 600 x 300 x 30 / 50mm Bullnose dropface 600 x 400 x 30 / 50mm Bullnose dropface 600 x 500 x 30mm Organic stepper
Capri Lido Sandblasted & tumbled	20mm Random crazy paving 600 x 400 x 20mm 600 x 400 x 30mm Standard tile/square edge 600 x 400 x 30 / 50mm Dropface 100 x 100 x 20mm Cobble
Capri Nube Sandblasted & Tumbled	20mm Random crazy paving 600 x 400 x 20mm 600 x 400 x 30mm Standard tile/square edge 200 x 50 x 20mm Baton sanblasted & tumbled 600 x 400 x 30 / 50mm Dropface 100 x 100 x 20mm Cobble
Capri Miele Natural Split	300 x 300 x 15mm 400 x 400 x 15mm 500 x 500 x 20mm 600 x 400 x 15mm 600 x 600 x 20mm 800 x 400 x 20mm
Capri Pacifica Sandblasted & tumbled	610 x 406 x 12mm 610 x 406 x 30mm Standard tile/square edge 610 x 406 x 30 / 50mm Dropface

2 Kirkdale Street, Brunswick East Victoria 3057, Australia,
03 9457 7489 ABN: 28 639 735 569

Limestone Tile

Stone type and finish	Available tile sizes
Capri Mare Sandblasted & tumbled	610 x 406 x 12mm 610 x 406 x 30mm Standard tile/square edge 610 x 406 x 30 / 50mm Dropface
Capri Perla Acid-etched & tumbled	20mm Random ccrazy paving 600 x 400 x 20mm 600 x 400 x 30mm Standard tile/square edge 600 x 400 x 30 / 50mm Dropface 100 x 100 x 20mm Cobble 600 x 600 x 20mm Stepper
Capri Tundra Sandblasted & tumbled	610 x 406 x 15mm 610 x 406 x 30mm Standard tile/square edge 610 x 406 x 30 / 50mm Dropface

2 Kirkdale Street, Brunswick East Victoria 3057, Australia,
03 9457 7489 ABN: 28 639 735 569

Installation Guidelines

Natural stone

These guidelines are general advice only and should be used with relevant Australian standards. They do not replace professional installation services.

Before installation

- Natural stone tiles may arrive slightly damp or with residue. Wash and let them dry fully slight lightening is normal and reveals natural tones.
- Lay tiles out to view markings and mix from all crates for even colour and pattern.
Minor edge chipping is normal and suitable for cuts.
- Grade tiles by thickness install thicker ones first and bed thinner ones with adhesive for a level finish. Size and thickness variations are part of the stone's character.
- Ensure tiles are clean, dry, and free of dust before laying. Confirm your installer is familiar with the product.

Please note:

Every piece of natural stone is unique. Variations in colour, texture, and surface finish including minor chipping are inherent and add to its individuality. Any tiles with excessive damage or irregularity should be set aside and reviewed before installation, as once installed they may not be covered by warranty.

Adhesion

For a lasting installation, all stone tiles must be solidly bedded with 100% adhesive coverage. During installation, tiles should be lifted occasionally to confirm full compaction and adhesion have been achieved.

We recommend using Mapei or Laticrete products for the installation process both are well-established brands with proven performance:
Laticrete Australia
Mapei Australia

2 Kirkdale Street, Brunswick East Victoria 3057, Australia,
03 9457 7489 ABN: 28 639 735 569

Installation Guidelines

Fast-setting adhesives are often preferable, as they help minimise issues caused by moisture retention in certain stones. Some materials may require specialised adhesives to ensure a secure bond always check with the adhesive manufacturer for product-specific guidance suited to your stone type.

For light-coloured stones, use white adhesives to prevent any potential discolouration within the body of the stone. Where substrates are flexible such as timber floors use flexible adhesives and ensure the substrate is properly prepared.

For uncalibrated stone tiles, choose a large-format floor adhesive to accommodate variations in tile thickness. This will help achieve a level surface, especially when installing a mix of sizes within the same area.

Grouts

Grout plays an important role in maintaining your stone installation. It helps keep tiles securely in place, creates a watertight seal to reduce moisture penetration, and allows for natural expansion and contraction.

Always use a high-quality grout that suits both the stone type and the intended application.
Reliable grouting options include:

Laticrete Australia
Mapei Australia

For best results, consult a professional when selecting grout to ensure the right colour, suitability, and durability for your project.