


Bluestone Tile



Bluestone Tile

Bluestone tiles embody strength and natural sophistication, defined by their cool blue-grey tones and fine-grained texture. Equally suited to indoor and outdoor spaces, they balance durability with refined visual depth. Honed or textured finishes highlight subtle mineral variations, creating surfaces that feel grounded, architectural, and timeless in both modern and classic design contexts.

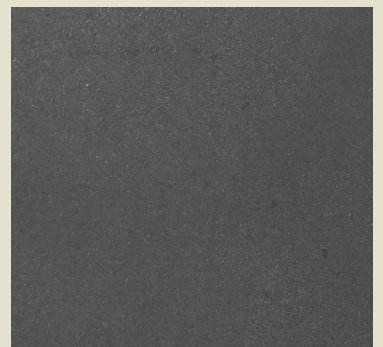


Bluestone Tile

Tiles:



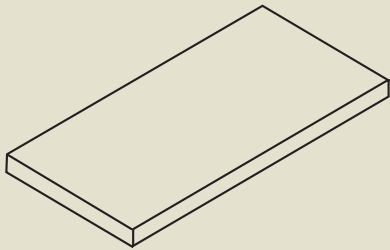
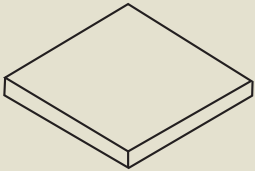


Cobblestones:



For more downloadables visit our website.

Bluestone Tile

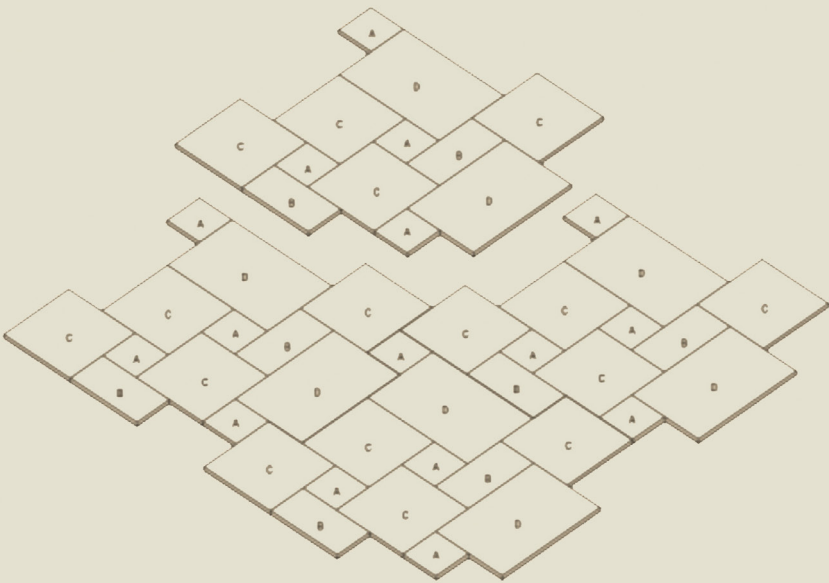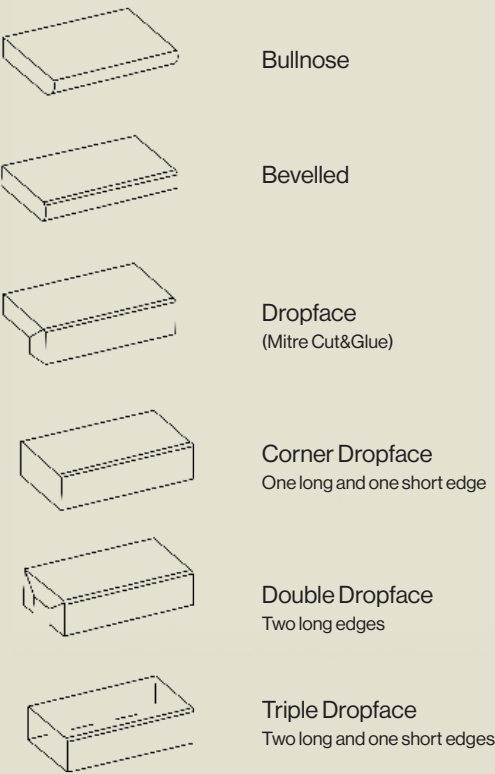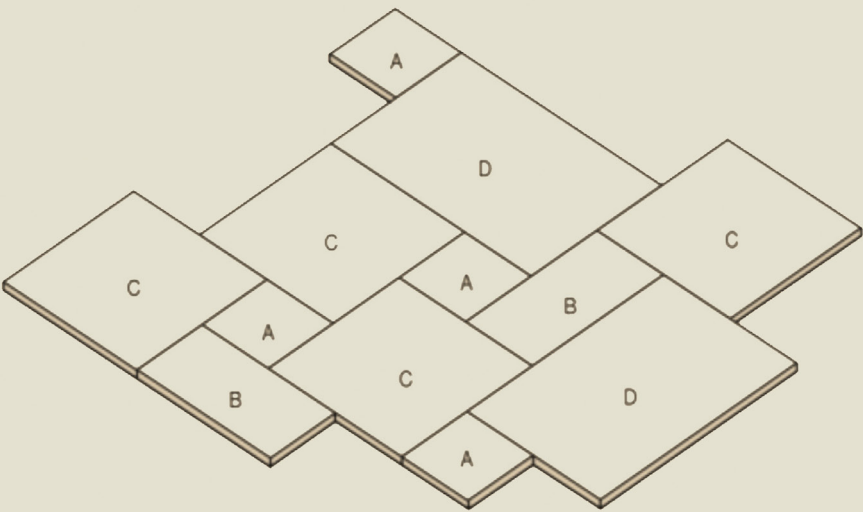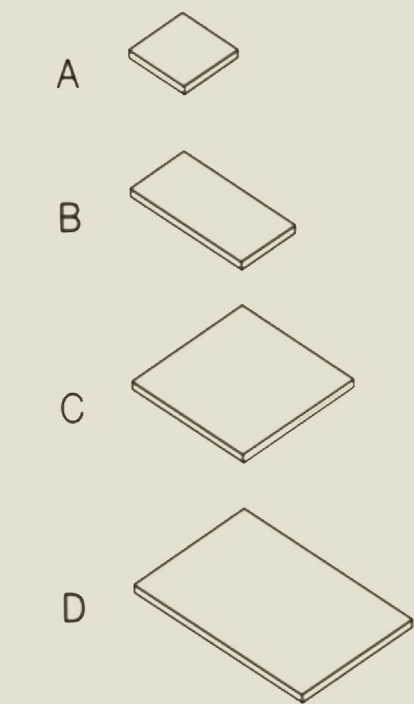

French Pattern

For more downloadables visit our website.

Bluestone Tile

Stone type and finish

Available tile sizes

Basalto Fumé

Sandblasted

600 x 400 x 20mm
600 x 400 x 20 / 60mm Dropface
600 x 400 x 30mm Bevelled edge

Basalto Di Mare

Sawn P5

600 x 300 x 12mm
300 x 100 x 20mm
400 x 400 x 20mm
500 x 500 x 20mm
600 x 300 x 20mm
600 x 400 x 20mm
600 x 600 x 20mm
800 x 400 x 20mm
800 x 800 x 20mm
995 x 495 x 20mm
1000 x 1000 x 20mm
1005 x 500 x 20mm
1200 x 600 x 20mm
400 x 400 x 30mm
600 x 300 x 30mm
600 x 600 x 30mm
800 x 400 x 30mm
495 x 495 x 40mm
995 x 495 x 40mm
995 x 495 x 40mm
20mm Crazy paving
20mm French pattern
500 - 700 x 20mm Stepper
300 - 500 x 30mm Stepper
500 - 700 x 30mm Stepper
700 - 900 x 30mm Stepper
800 - 1000 x 600 x 150mm Giant stepper
650 x 430 x 20mm Cobble on mesh
100 x 100 x 30 / 40mm All sides rockface cobble
100 x 100 x 30mm Tumbled cobble

600 x 400 x 20 / 40mm Dropface
800 x 400 x 20 / 50mm Dropface
600 x 400 x 20 / 60mm Dropface
800 x 400 x 20 / 60mm Dropface
500 x 500 x 30 / 80mm Dropface
800 x 400 x 30 / 80mm Dropface
1005 x 500 x 30 / 80mm Dropface

600 X 300 x 30 Sawn bevelled edge
600 X 350 x 30 Sawn bevelled edge
600 X 400 x 30 Sawn bevelled edge
800 X 400 x 30 Sawn bevelled edge
1005 X 350 x 30 Sawn bevelled edge
1005 X 500 x 30 Sawn bevelled edge

600 x 300 x 30mm Bullnose
600 x 350 x 30mm Bullnose
600 x 400 x 30mm Bullnose
800 x 400 x 30mm Bullnose
1005 x 350 x 30mm Bullnose
1005 x 500 x 30mm Bullnose

Bluestone Tile

Stone type and finish

Available tile sizes

Basalto Di Mare

Honed P3

600 x 300 x 12mm

600 x 600 x 12mm

800 x 400 x 15mm

300 x 100 x 20mm

600 x 300 x 20mm

600 x 400 x 20mm

600 x 600 x 20mm

800 x 400 x 20mm

800 x 800 x 20mm

1005 x 500 x 20mm

1200 x 600 x 20mm

20mm Crazy paving honed 20mm

French pattern honed 500 - 700 x

20mm Honed stepper

600 x 400 x 20 / 40mm Dropface

600 x 400 x 20 / 60mm Dropface

1005 x 500 x 30 / 80mm Dropface

500 X 500 x 30mm Bevelled edge

600 X 300 x 30mm Bevelled edge

600 X 350 x 30mm Bevelled edge

600 X 400 x 30mm Bevelled edge

800 X 400 x 30mm Bevelled edge

600 x 300 x 20mm Bullnose

600 x 350 x 30mm Bullnose

600 x 400 x 30mm Bullnose

1005 x 350 x 30mm Bullnose

Basalto Di Mare Ves

Honed P3

600 x 400 x 20mm

800 x 400 x 20mm

1005 x 500 x 20mm

20mm French pattern honed

100 x 100 x 30mm Tumbled cobble

600 x 400 x 20 / 50mm Honed dropface

800 x 400 x 20 / 50mm Honed dropface

600 x 400 x 3 mm Honed bevelled edge

Basalto Ombra

Flamed

800 x 400 x 20mm

800 x 400 x 20 / 50mm Dropface

800 x 400 x 30mm Bevelled edge

Installation Guidelines

Natural stone

These guidelines are general advice only and should be used with relevant Australian standards. They do not replace professional installation services.

Before installation

- Natural stone tiles may arrive slightly damp or with residue. Wash and let them dry fully slight lightening is normal and reveals natural tones.

- Lay tiles out to view markings and mix from all crates for even colour and pattern.

Minor edge chipping is normal and suitable for cuts.

- Grade tiles by thickness install thicker ones first and bed thinner ones with adhesive for a level finish. Size and thickness variations are part of the stone's character.

- Ensure tiles are clean, dry, and free of dust before laying. Confirm your installer is familiar with the product.

Please note:

Every piece of natural stone is unique. Variations in colour, texture, and surface finish including minor chipping are inherent and add to its individuality. Any tiles with excessive damage or irregularity should be set aside and reviewed before installation, as once installed they may not be covered by warranty.

Adhesion

For a lasting installation, all stone tiles must be solidly bedded with 100% adhesive coverage. During installation, tiles should be lifted occasionally to confirm full compaction and adhesion have been achieved.

We recommend using Mapei or Laticrete products for the installation process both are well-established brands with proven performance:

[Laticrete Australia](#)

[Mapei Australia](#)

Fast-setting adhesives are often preferable, as they help minimise issues caused by moisture retention in certain stones. Some materials may require specialised adhesives to ensure a secure bond always check with the adhesive manufacturer for product-specific guidance suited to your stone type.

For light-coloured stones, use white adhesives to prevent any potential discolouration within the body of the stone. Where substrates are flexible such as timber floors use flexible adhesives and ensure the substrate is properly prepared.

For uncalibrated stone tiles, choose a large-format floor adhesive to accommodate variations in tile thickness. This will help achieve a level surface, especially when installing a mix of sizes within the same area.

Grouts

Grout plays an important role in maintaining your stone installation. It helps keep tiles securely in place, creates a watertight seal to reduce moisture penetration, and allows for natural expansion and contraction.

Always use a high-quality grout that suits both the stone type and the intended application.

Reliable grouting options include:

[Laticrete Australia](#)

[Mapei Australia](#)

For best results, consult a professional when selecting grout to ensure the right colour, suitability, and durability for your project.