




Porphyry Tile



Porphyry Tile

Porphyry tiles express strength and natural sophistication through their rich earthy hues and fine crystalline texture. Formed deep within volcanic rock, each piece reveals subtle variations of plum, bronze, and grey that lend depth and authenticity to exterior spaces. Exceptionally durable and naturally slip-resistant, Porphyry embodies timeless European craftsmanship and enduring design integrity.

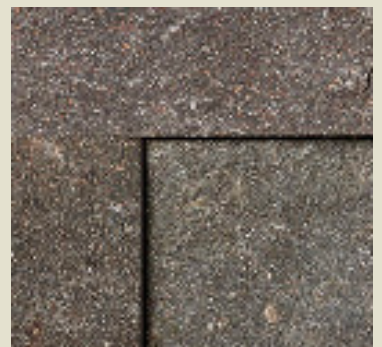


Porphyry Tile

Tiles:

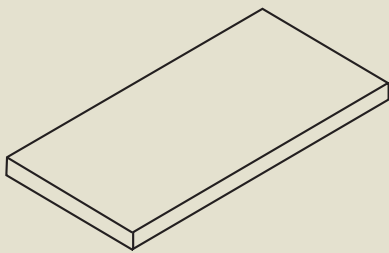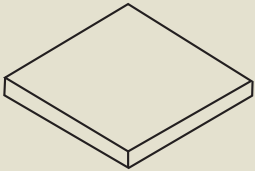

Cobblestones:



For more downloadables visit our website.

Porphyry Tile

Stone type and finish

Available tile sizes

Porphyry

Natural Split, cobble

Crazy Paving 20mm

Cobble Top flamed, 4 sides split on mesh backing, brick pattern

Mesh size: 600 x 300 x 20mm

Cobble size = 100 x 100mm

Platinum Porphyry

Natural, Split, Cobble

Crazy Paving 15-30mm

Circular Stepper 500 x 500 x 20mm

Cobble 100 x 100 x 40mm

Porphyry Notturna

Natural, Split, Cobble

Crazy Paving 15 - 30mm

Circular Stepper 500 x 500 x 20mm

Cobble 100 x 100 x 40mm

Installation Guidelines

Natural stone installation guidelines

These guidelines are general advice only and should be used with relevant Australian standards. They do not replace professional installation services.

Before installation

- Natural stone tiles may arrive slightly damp or with residue. Wash and let them dry fully slight lightening is normal and reveals natural tones.
 - Lay tiles out to view markings and mix from all crates for even colour and pattern.
- Minor edge chipping is normal and suitable for cuts.
- Grade tiles by thickness install thicker ones first and bed thinner ones with adhesive for a level finish. Size and thickness variations are part of the stone's character.
 - Ensure tiles are clean, dry, and free of dust before laying. Confirm your installer is familiar with the product.

Please note:

Every piece of natural stone is unique. Variations in colour, texture, and surface finish including minor chipping are inherent and add to its individuality. Any tiles with excessive damage or irregularity should be set aside and reviewed before installation, as once installed they may not be covered by warranty.

Adhesion

For a lasting installation, all stone tiles must be solidly bedded with 100% adhesive coverage. During installation, tiles should be lifted occasionally to confirm full compaction and adhesion have been achieved.

We recommend using Mapei or Laticrete products for the installation process both are well-established brands with proven performance:

[Laticrete Australia](#)

[Mapei Australia](#)

Fast-setting adhesives are often preferable, as they help minimise issues caused by moisture retention in certain stones. Some materials may require specialised adhesives to ensure a secure bond always check with the adhesive manufacturer for product-specific guidance suited to your stone type.

For light-coloured stones, use white adhesives to prevent any potential discolouration within the body of the stone. Where substrates are flexible such as timber floors use flexible adhesives and ensure the substrate is properly prepared.

For uncalibrated stone tiles, choose a large-format floor adhesive to accommodate variations in tile thickness. This will help achieve a level surface, especially when installing a mix of sizes within the same area.

Grouts

Grout plays an important role in maintaining your stone installation. It helps keep tiles securely in place, creates a watertight seal to reduce moisture penetration, and allows for natural expansion and contraction.

Always use a high-quality grout that suits both the stone type and the intended application.

Reliable grouting options include:

[Laticrete Australia](#)

[Mapei Australia](#)

For best results, consult a professional when selecting grout to ensure the right colour, suitability, and durability for your project.