



Limestone Tile



Limestone Tile

Soft in tone yet strong in structure, Limestone tiles bring a sense of timeless calm to any space. Their organic variation and subtle movement create surfaces that feel grounded and enduring, ideal for both contemporary and classic design. Naturally cool underfoot and beautifully tactile, Limestone offers understated luxury for floors, walls, and outdoor settings.




Limestone Tile

Tiles:


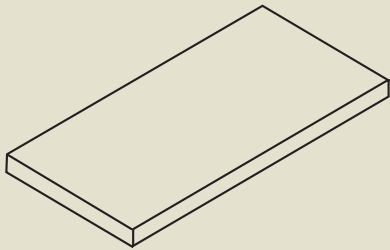
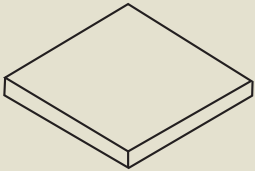


Cobblestones:



For more downloadables visit our website.

Limestone Tile

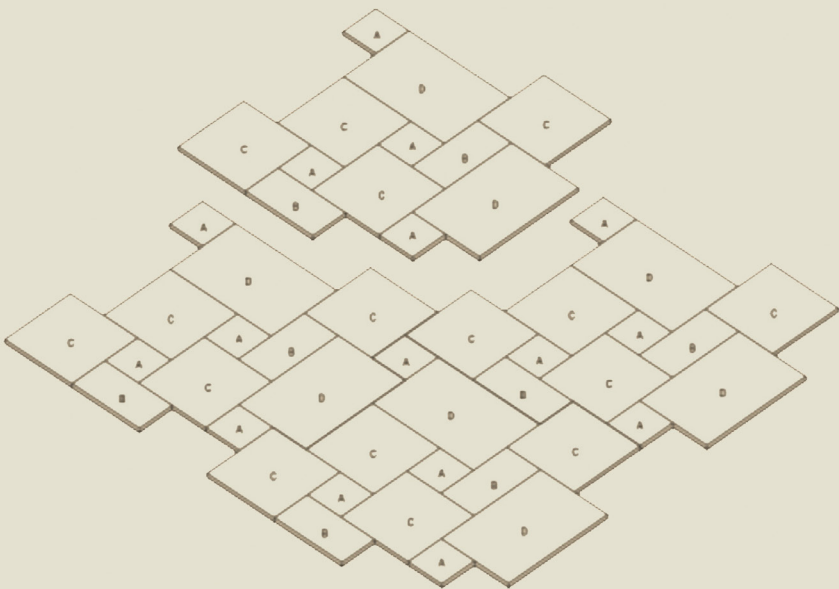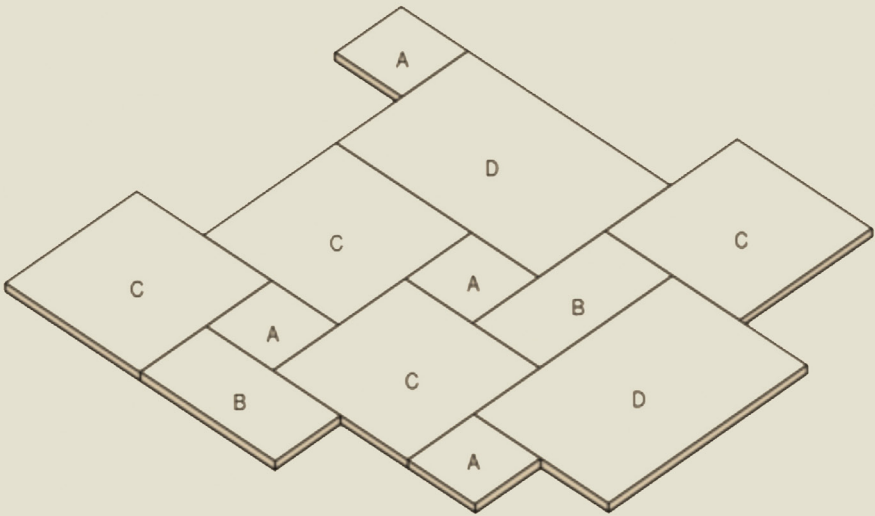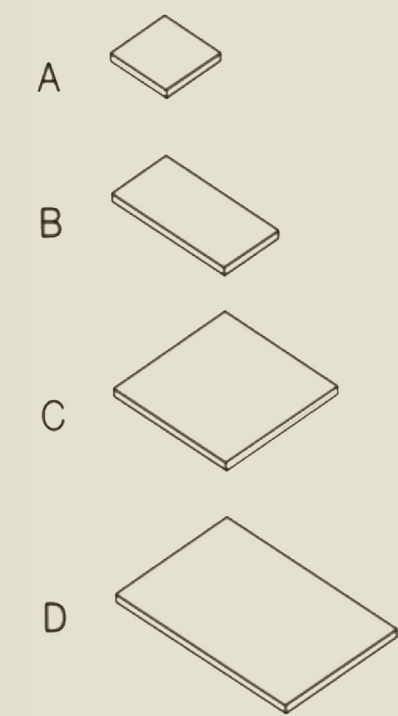

French Pattern




Bullnose




Bevelled




Dropface
(Mitre Cut&Glue)



Corner Dropface
One long and one short edge



Double Dropface
Two long edges



Triple Dropface
Two long and one short edges

For more downloadables visit our website.

Limestone Tile

Stone type and finish

Available tile sizes

Sienna Oro

Sandblasted & Tumbled

610 x 406 x 12mm
610 x 406 x 30mm
900 x 600 x 20mm
610 x 406 x 30 mm Bullnose
610 x 406 x 30 / 60mm Dropface
900 x 400 x 30 / 70mm Dropface
1220 x 406 x 30mm Pencil edge
700 x 580 x 30mm Organic stepper
French pattern set x 12mm

Sienna Ombro

Acid Washed and Tumbled

610 x 406 x 12mm
610 x 406 x 30mm
610 x 406 x 30mm Bullnose
610 x 406 x 30 / 60mm Dropface

Sienna Fumé

Sandblasted & Tumbled

610 x 406 x 15mm
610 x 406 x 30mm
610 x 406 x 30 / 60mm Dropface

Sienna Terra

Sandblasted & Tumbled

610 x 406 x 12mm
610 x 406 x 30mm
900 x 600 x 20mm
610 x 406 x 30 / 60mm Dropface
900 x 600 x 30 / 70mm Dropface

Capri Scuro

Sandblasted

600 x 400 x 20mm
600 x 400 x 20 / 60mm Dropface
600 x 400 x 30mm Bevelled
100 x 100 x 20mm Cobble

Limestone Tile

Stone type and finish

Available tile sizes

Capri Tempesta
Acid Washed & Tumbled

600 x 400 x 18mm
600 x 400 x 20 / 60mm Dropface
600 x 400 x 30mm Bevelled

Capri Crema
Sawn edge, Natural Split

18-25 mm Random crazy paving
400 x 400 x 30mm
600 x 400 x 30mm
600 x 600 x 30mm
800 x 400 x 30mm
600 x 300 x 30mm Bullnose
600 x 400 x 30mm Bullnose
800 x 600 x 30mm Organic stepper
600 x 500 x 30mm Organic stepper

Capri Notte
Sandblasted & Tumbled

30mm Random crazy paving
610 x 406 x 12mm
610 x 406 x 30mm Standard tile/square edge coper
610 x 406 x 30 / 50mm Dropface

Capri Neve
Sandblasted & Tumbled

30mm Random crazy paving
610 x 406 x 12mm
610 x 406 x 30mm Standard tile/square edge
610 x 406 x 30 / 50mm Dropface

Capri Coralia
Honed & Tumbled

20mm Random crazy paving
600 x 400 x 20mm
600 x 400 x 30mm Standard tile/square edge
600 x 400 x 30/ 50mm Dropface
100 x 100 x 20mm Cobble

Limestone Tile

Stone type and finish

Available tile sizes

Capri Nero

Sawn edge, Natural Split

18-25 mm Random crazy paving
300 x 300 x 15mm
400 x 400 x 15mm
500 x 500 x 15mm
600 x 300 x 15mm
600 x 600 x 15mm
600 x 600 x 30mm
600 x 300 x 30mm Bullnose
600 x 400 x 30mm Bullnose
600 x 300 x 30 / 50mm Bullnose dropface
600 x 400 x 30 / 50mm Bullnose dropface
600 x 500 x 30mm Organic stepper

Capri Lido

Sandblasted & tumbled

20mm Random crazy paving
600 x 400 x 20mm
600 x 400 x 30mm Standard tile/square edge
600 x 400 x 30 / 50mm Dropface
100 x 100 x 20mm Cobble

Capri Nube

Sandblasted & Tumbled

20mm Random crazy paving
600 x 400 x 20mm
600 x 400 x 30mm Standard tile/square edge
200 x 50 x 20mm Baton sandblasted & tumbled
600 x 400 x 30 / 50mm Dropface
100 x 100 x 20mm Cobble

Capri Miele

Natural Split

300 x 300 x 15mm
400 x 400 x 15mm
500 x 500 x 20mm
600 x 400 x 15mm
600 x 600 x 20mm
800 x 400 x 20mm

Capri Pacifica

Sandblasted & tumbled

610 x 406 x 12mm
610 x 406 x 30mm Standard tile/square edge
610 x 406 x 30 / 50mm Dropface

Limestone Tile

Stone type and finish	Available tile sizes
Capri Mare Sandblasted & tumbled	610 x 406 x 12mm 610 x 406 x 30mm Standard tile/square edge 610 x 406 x 30 / 50mm Dropface
Capri Perla Acid-etched & tumbled	20mm Random ccrazy paving 600 x 400 x 20mm 600 x 400 x 30mm Standard tile/square edge 600 x 400 x 30 / 50mm Dropface 100 x 100 x 20mm Cobble 600 x 600 x 20mm Stepper
Capri Tundra Sandblasted & tumbled	610 x 406 x 15mm 610 x 406 x 30mm Standard tile/square edge 610 x 406 x 30 / 50mm Dropface

Installation Guidelines

Natural stone

These guidelines are general advice only and should be used with relevant Australian standards. They do not replace professional installation services.

Before installation

- Natural stone tiles may arrive slightly damp or with residue. Wash and let them dry fully slight lightening is normal and reveals natural tones.

- Lay tiles out to view markings and mix from all crates for even colour and pattern.

Minor edge chipping is normal and suitable for cuts.

- Grade tiles by thickness install thicker ones first and bed thinner ones with adhesive for a level finish. Size and thickness variations are part of the stone's character.

- Ensure tiles are clean, dry, and free of dust before laying. Confirm your installer is familiar with the product.

Please note:

Every piece of natural stone is unique. Variations in colour, texture, and surface finish including minor chipping are inherent and add to its individuality. Any tiles with excessive damage or irregularity should be set aside and reviewed before installation, as once installed they may not be covered by warranty.

Adhesion

For a lasting installation, all stone tiles must be solidly bedded with 100% adhesive coverage. During installation, tiles should be lifted occasionally to confirm full compaction and adhesion have been achieved.

We recommend using Mapei or Laticrete products for the installation process both are well-established brands with proven performance:

[Laticrete Australia](#)

[Mapei Australia](#)

Fast-setting adhesives are often preferable, as they help minimise issues caused by moisture retention in certain stones. Some materials may require specialised adhesives to ensure a secure bond always check with the adhesive manufacturer for product-specific guidance suited to your stone type.

For light-coloured stones, use white adhesives to prevent any potential discolouration within the body of the stone. Where substrates are flexible such as timber floors use flexible adhesives and ensure the substrate is properly prepared.

For uncalibrated stone tiles, choose a large-format floor adhesive to accommodate variations in tile thickness. This will help achieve a level surface, especially when installing a mix of sizes within the same area.

Grouts

Grout plays an important role in maintaining your stone installation. It helps keep tiles securely in place, creates a watertight seal to reduce moisture penetration, and allows for natural expansion and contraction.

Always use a high-quality grout that suits both the stone type and the intended application.

Reliable grouting options include:

[Laticrete Australia](#)

[Mapei Australia](#)

For best results, consult a professional when selecting grout to ensure the right colour, suitability, and durability for your project.